

FACE, HEAD & NECK PROTECTION



SALISBURY by Honeywell
Electrical and Fire Protection
10000 10th Street, Suite 100
Charlotte, NC 28226
Phone: 704.547.1111
Fax: 704.547.1112
www.salisburyhoneywell.com

SALISBURY
by Honeywell

SALISBURY

by Honeywell

AS2000HAT PROTECTIVE FACE SHIELD

12-20 CAL/CM² WEIGHT BALANCING ARC FLASH PROTECTION FACE SHIELD

AS2000HAT - Salisbury by Honeywell's NEW revolutionary AS2000HAT is a Weight Balancing Arc Flash Protection Face Shield. The shield stows in a balanced, compact position, centered over the top of the hard hat when not in use. The AS2000HAT has an ATPV rating of 20 cal/cm² and utilizes nanotechnology to provide a clearer, more transparent window for improved visibility. The face shield unit includes ventilation ribs that allow a natural convection air flow through the top of the face shield. This reduces fogging of the visor, lowers CO₂ levels and improves comfort.

AS2000HAT SERIES


- 7.5" x 20" Viewing area
- Extra light tint
- .06" Thick
- Absorbs >99.9% of harmful UV radiation
- Resistant to fogging
- Meets current ANSI Z87.1 and is CSA standard compliant
- Tested to ASTM F2178 specifications



AS1200HAT - Salisbury by Honeywell's revolutionary AS1200HAT is a Weight Balancing Arc Flash Protection Face Shield, that stows in a balanced, compact position, centered over the top of the hard hat when not needed. The AS1200HAT has an ATPV rating of 12 cal/cm² and utilizes nanotechnology to provide a more transparent window for improved visibility. The shield/window is designed to be easily replaced without tools. The face shield unit includes ventilation ribs that allow a natural convection air flow through the top of the face shield. This reduces fogging of the visor, lowers CO₂ levels and improves comfort for the user.

AS1200 SERIES

- 7.5" x 20" Viewing area
- Extra light tint
- .06" Thick
- Absorbs >99.9% of harmful UV radiation
- Resistant to fogging
- Meets current ANSI Z87.1 and is CSA standard compliant
- Tested to ASTM F2178 specifications

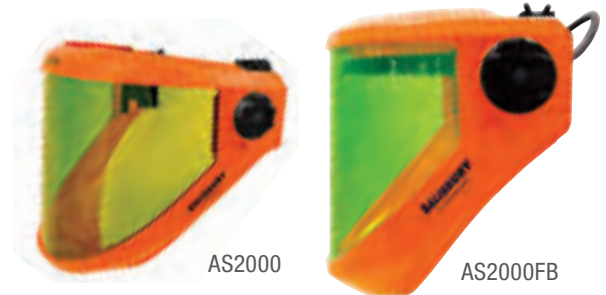

CAT. NO.	DESCRIPTION
AS2000HAT	20 cal/cm ² , arc flash protection face shield unit w/SA79R03 hard hat
AS2000HAT-CLR	20 cal/cm ² , arc flash protection face shield unit w/SA79R03 hard hat and transparent chin guard
AS2000	20 cal/cm ² , arc flash protection face shield unit
AS2000FB	20 cal/cm ² , arc flash protection face shield unit for full brim hard hats
AS2000FS	Replacement face shield/window
AS1200HAT	12 cal/cm ² weight balancing arc flash protection face shield unit w/hard hat
AS1200HAT-CLR	AS1200HAT w/ transparent chin guard
AS1200PPC	12 cal/cm ² weight balancing arc flash protection face shield unit. Made of Premium Polycarbonate with permanent anti-fog/anti-scratch coating
AS1200CLR-PPC	12 cal/cm ² weight balancing arc flash protection face shield unit with transparent chin protector. Made of Premium Polycarbonate with permanent anti-fog/anti-scratch coating
AS1200	12 cal/cm ² weight balancing arc flash protection face shield unit.



NOTE: IN ORDER TO ACHIEVE 360 DEGREE 20 CAL/CM² PROTECTION, A 20 CAL/CM² BALACLAVA MUST BE WORN.

NFPA 70E: AN ARC RATED HOOD SHALL BE USED WHEN THE ANTICIPATED INCIDENT ENERGY EXPOSURE EXCEEDS 12 CAL/CM².

AS1200 UNIVERSAL FIT PROTECTIVE FACE SHIELD FOR FULL OR FRONT BRIM - HRC 2

12 CAL/CM²

UNIVERSAL FIT AS1200FB & AS1200U - Salisbury by Honeywell's NEW revolutionary AS1200FB and AS1200U are weight balancing arc flash protection face shield that fit ALL popular full brim (AS1200FB) or front brim (AS1200U) hard hats.

The AS1200FB and AS1200U assembly attaches to the full or front brim hard hat with an elastomeric band that secures the bracket onto the brim. All parts are dielectric and specifically designed for arc flash protection.

The AS1200FB and AS1200U have an ATPV rating of 12 cal/cm² (NFPA 70E HRC 2) and utilizes nanotechnology and an anti-fog coating, to provide a clearer, more transparent window for improved visibility. The face shield unit includes an upper bracket ventilation feature that allows a natural air flow through the top of the face shield. This reduces fogging of the visor, lowers CO₂ levels and improves comfort for the user.

OPTIONAL ACCESSORIES

TRANSPARENT CHIN GUARD

The Transparent Chin Guard dramatically increases the user's peripheral view. The enhanced viewing area increases worker performance and productivity. The highly-transparent chin guard allows improved awareness and greater safety.

AS1200FB with
Full Brim Hard Hat
& FLKIT



AS12CLR-FB



REVOLUTIONARY AS1200FB & AS1200U

- 7.5" x 20" Viewing area
- Extra light tint
- .06" Thick
- Absorbs >99.9% of harmful UV radiation
- Resistant to fogging
- Meets current ANSI Z87.1 and tested to ASTM F2178 specifications
- Unique weight balancing design
- Optional task light feature
- Replaceable window, no tools required
- AS1200FB fits all popular full brim hard hats
- AS1200U fits all popular front brim hard hats
- Ventilated design
- Adjustable pivot tension
- Can be easily removed from the hard hat
- One hand operation



AS1200U

IMPROVED NOW 35 LUMENS



ASFL



FLCLIP (1)




AS12CLIP



FLKIT



AFLENS



AS1200FS-FB



AFLENSU

SALISBURY ADVANTAGE
ANTI-FOG LENS



AS1200HAT-CLR

If you need it, request it. Call customer service if you need something not seen here.

PROTECTIVE FACE SHIELD OPTIONAL ACCESSORIES

AFLENS ANTI-FOG INNER LENS

- Includes an air spaced design that decreases fogging
- Natural convection air flow design also helps minimize fogging
- Shield meets the ASTM requirements for an Anti-Fog Lens

ASFL FLAME RESISTANT ATTACHABLE TASK LIGHTS

The arc tested ASFL arc rated task light features a high intensity long lasting white LED lamp with an overall brightness of 35 lumens. From a 24 inch distance, the beam is approximately 6-7 inch in diameter. The high intensity illumination is very useful when working up close. 2 AAA batteries provide 14-15 hours of high brightness.

NOTE: The AS1200HAT can hold 2 ASFL task lights. The FLKIT only contains 1 task light and 1 clip.

AS12CLR TRANSPARENT CHIN GUARD

The AS12CLR Transparent Chin Guard dramatically increases the user's peripheral view. The enhanced viewing area increases worker performance and productivity. The highly transparent chin guard allows improved awareness and greater safety.

CAT. NO.	DESCRIPTION
AS1200	Weight balancing arc flash protection face shield unit
AS1200FB	12 cal/cm ² , Universal fit, arc flash protection face shield unit for full brim hard hats
AS120RG-FB	Orange chin guard for AS1200FB
AS12CLR-FB	Transparent chin guard for AS1200 series full brim
AS1200FS-FB	Replacement face shield/window 12 cal/cm ² for AS1200FB full brim
AS1200U	12 cal/cm ² , Universal fit, arc flash protection face shield unit for front brim hard hats
AS1200FS	Replacement window for AS1200 series front brim
AS1200HAT	Weight balancing arc flash protection face shield unit w/ hard hat
AS1200HAT-CLR	AS1200HAT w/ transparent chin guard
AFLENS	Anti-fog inner lens
ASFL	Arc rated attachable task light (1)
AS12CLIP	Replacement clips set (2) for AS1200HAT shield
FLCLIP	Attachable task light clip (1)
FLKIT	Attachable task light (1) & FLCLIP
AS12CLR	Transparent chin guard
AFLENSU	Inner Anti-Fog Lens for PRO-HOOD®



AS12CLR



NOTE: IN ORDER TO ACHIEVE 360 DEGREE 20 CAL/CM² PROTECTION, A 20 CAL/CM² BALACLAVA MUST BE WORN.
NFPA 70E: AN ARC RATED HOOD SHALL BE USED WHEN THE ANTICIPATED INCIDENT ENERGY EXPOSURE EXCEEDS 12 CAL/CM².

AS1000/AS1500 SERIES PROTECTIVE FACE SHIELD UNITS & ACCESSORIES - HRC 2

10 CAL/CM²

AS1000 SERIES

- 10 cal/cm² ATPV rating when used with the included chin cup
- 7.5" x 20" Viewing area
- Extra light tint
- .06" Thick
- Absorbs >99.9% of harmful UV radiation
- Resistant to fogging
- Shield meets current ANSI Z87.1 and tested to ASTM F2178 specifications



AS1000HAT



AS1000




AS1000FB



ASBAG

CAT. NO.	DESCRIPTION
AS1000	AS1000FS Shield w/ integrated chin protector & slotted ASSLB BRACKET. Fits most slotted front brim hard hats.
AS1000U	AS1000FS Shield w/ integrated chin protector & universal BRACKET. Fits most front brim hard hats.
AS1000FB	AS1000FS Shield w/ integrated chin protector & universal FBBRACKET. Fits most full brim hard hats.
AS1000HAT	AS1000 w/ SA79R front brim hard hat.
ASBAG	Large face shield storage bag w/ drawstring closure with fleece lined interior (21"L X 19"W X 14"H).
SA79*	Peak front brim hard hat with rain trough, 4-Point nylon suspension, pin-lock adjustment. ANSI & CSA Type I, Class E. Dielectrically rated. ANSI Z89.1-2003
SA79R*	Peak front brim hard hat with rain trough, 4-Point nylon suspension, ratcheting adjustment. ANSI & CSA Type I, Class E. Dielectrically rated. ANSI Z89.1-2003

4-POINT RATCHETING REPLACEMENT NYLON SUSPENSION




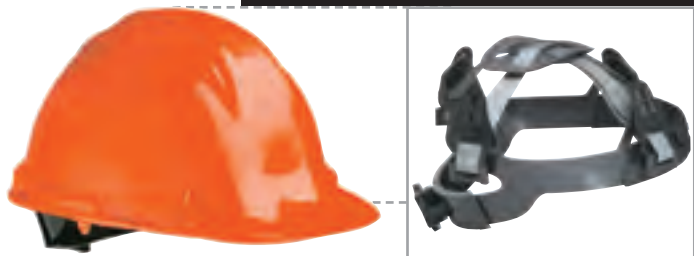


*IMPORTANT - Please add the color code to the end of hard hat #
(EX:SA7901 - White ANSI Type I, dielectric front brim hard hat w/quick-fit 4-Point suspension)


Color Codes	Stock Colors
01	White
02	Yellow
03	Orange

If You Need it, Request it. Call customer service if you need something not seen here.

UPGRADE YOUR PRO-HOOD® LENS: IF YOUR FH31RB, FH40GY, OR FH55GY LENS HAS MODEL # IM22-ARCAF6FL-2, YOU SHOULD UPGRADE TODAY TO THE 4000 CLEARER LENS FOR GREATER VISIBILITY.

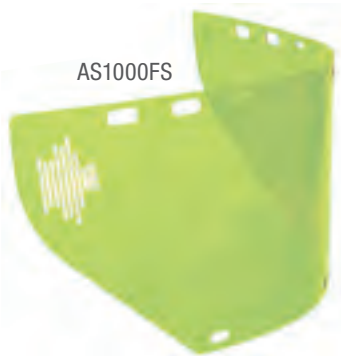

4000 & 10000PC
Dual Lens

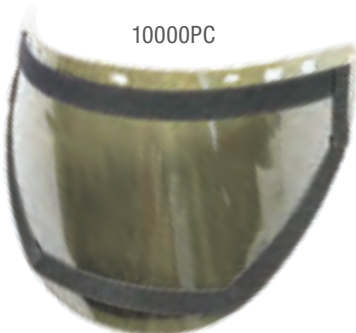

AS1000/AS1200/AS1500 & PRO-HOOD®

- 8 cal/cm² to 100 cal/cm² ATPV ratings
- 7.5" x 20" Viewing area for replacement AS1000 protective shield lenses
- 10" x 20" Viewing area for replacement PRO-HOOD® lenses
- 4000V and 10000V lenses have two layers of protection
- Extra light tint
- .06" Thick
- Absorbs >99.9% of harmful UV radiation
- Resistant to fogging
- Meets current ANSI Z87.1 and tested to ASTM F2178 specifications

AFLENSU - The universal inner lens is a field installed anti-fog lens for PRO-HOOD® arc flash protective switching hoods. Installs quickly without tools to the inside of the PRO-HOOD® face shield and can be removed for cleaning or replacement.

CAT. NO.	DESCRIPTION
AS1000FS	Replacement face shield for AS1000HAT, AS1000FB and AS1000U. Used with the ASSLB, FB BRACKET, or BRACKET brackets and ASCP.
AS1200FS	Replacement window for AS1200HAT, 12 cal/cm ² .
AS1200FS-FB	Replacement face shield/window 12 cal/cm ² for AS1200FB full brim
AFLENSU	Inner Anti-Fog Lens for PRO-HOOD®.
2000	Replacement lens, with hook & pile attachment, for OLDER DESIGN 8 cal/cm ² to 20 cal/cm ² PRO-HOOD®. Single layer lens. Used with the ASSLB, FB BRACKET, or BRACKET brackets.
4000	Replacement lens, with hook & pile attachment, for 31 cal/cm ² to 40 cal/cm ² PRO-HOOD®. Dual layer lens. Used with the ASSLB, FB BRACKET, or BRACKET brackets.
10000PC	Replacement lens, with hook & pile attachment, for 75 cal/cm ² to 100 cal/cm ² PRO-HOOD®. Dual layer lens (clear and tinted). Used with the ASSLB, FB BRACKET, or BRACKET brackets.